


Reed sensor FT07 series

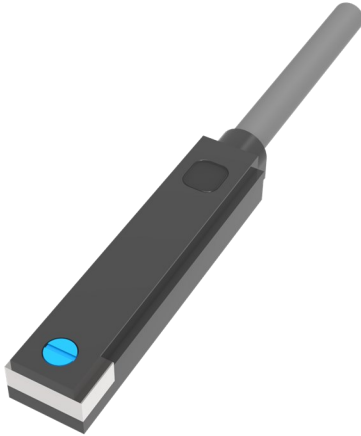

Model specification

- Long life and high reliability
- Yellow LED display can check the status of the sensor
- Widely used in the field of piston position detection and door position detection of cylinders

Model specification

NO	FT07DLO		
----	---------	--	--

Specifications

Supply voltage	10...30 VDC	Withstand voltage	1000V/AC 50/60Hz 60s
Contact capacity	1W	Insulation resistance	≥50MΩ (500VDC)
Load current	≤50mA	Vibration resistant	Complex amplitude 1.5mm 10...50Hz
Residual voltage	≤2.5VDC		(2 hours each in X, Y, and Z directions)
Indicator	Yellow LED	Protection degree	IP67
Ambient temperature	-10...70°C	Dimension	4.5*6.2*26.8mm
Environment humidity	35...95%RH	Housing material	PBT
Switching frequency	200Hz	Connection type	2m PVC cable

Dimension

